

# MASTER SBX

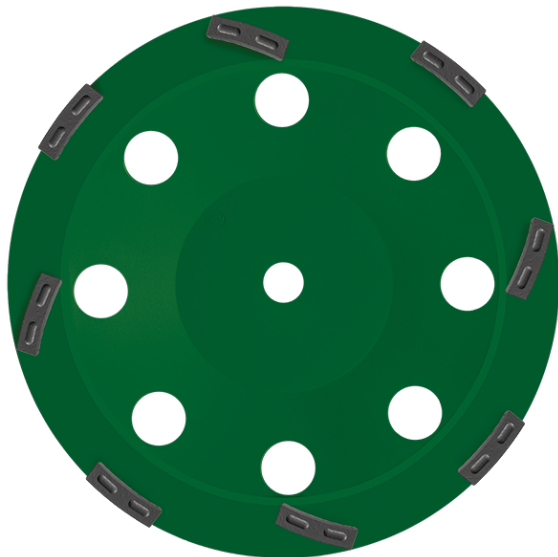


fig. **SBX** item number: 350119

EN 13236  
compliant



## ADVANTAGES

- Premium diamond grinding cup wheel for floor grinding machine FGR 500 for floor renovation
- segment height: 10 mm
- medium hard bond system for segments

## MATERIAL



screed	✓✓
screed abrasive	✓✓
cement-based tile adhesive	✓✓
cement-based Flex tile adhesive	✓✓
concrete abrasiv	✓✓
concrete	✓
paints	✓
coatings	✓


ITEM NUMBER	EAN	DESCRIPTION	Ø (MM)	BORE (MM)	NUMBER OF SEGMENTS	TOTAL HEIGHT THICKNESS (MM)
350119	3475183501199	SBX	300	22,23	8	22




FLOOR GRINDER

● CONCRETE    ● UNIVERSAL    ● GRANITE    ○ TILES    ● ASPHALT    ● SPECIAL


© SAMEDIA GMBH, no liability for printing errors! Technical changes and errors excepted, Illustrations may deviate from the original for reasons of presentation and are therefore non-binding!

**GRINDERS Ø 300 MM – SUITABLE FOR FLOORGRINDER FGR 5000**



MASTER SBM, Ø300




MASTER SBX, Ø300




MASTER PKR, Ø300




MASTER PKD, Ø300



MASTER PCD, Ø300



MASTER SBA, Ø300



MASTER RAP, Ø300

**MASTER**

 EN 13236  
compliant

 MADE IN  
EUROPE

**APPLICATION RANGE  
FLOOR GRINDERS**

APPLICATION RANGE

FLOOR GRINDERS

MATERIAL	TILE CEMEN/SCREED					CONCRETE/TILE CEMENT/UNIV				SPECIA			
	SBM	SBX	PKR	PKD	PCD	SBM	SBX	SBA	PKR	PKD	PCD	RAP	
	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	MASTER	
Quality level													
Material removal	FINE-MEDIUM	FINE-MEDIUM	MEDIUM-STRONG	STRONG	MEDIUM-STRONG	FINE-STRONG	FINE-STRONG	MEDIUM-STRONG	MEDIUM-STRONG	STRONG	MEDIUM-STRONG	FINE	
Illustration													
cement-based tile adhesive	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓		✓✓	✓✓	✓✓		
cement-based Flex tile adhesive	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓	✓✓		✓✓	✓✓	✓✓		
dispersion tile adhesive			✓✓	✓✓	✓✓				✓✓	✓✓	✓✓		
synthetic resin tile adhesive			✓✓	✓✓	✓✓				✓✓	✓✓	✓✓		
screed	✓	✓✓	✓	✓		✓	✓✓	✓✓	✓	✓			
screed abrasive		✓✓	✓	✓			✓✓	✓✓	✓	✓			
bitumen screed			✓✓	✓✓	✓✓				✓✓	✓✓	✓✓		
concrete	✓✓	✓	✓			✓✓	✓		✓			✓✓	
concrete abrasive	✓	✓✓	✓			✓	✓✓	✓✓	✓			✓✓	
granite	✓					✓							
adhesive residues			✓✓	✓	✓✓				✓✓	✓	✓✓		
carpet residues			✓✓	✓	✓✓				✓✓	✓	✓✓		
coatings	✓	✓	✓✓	✓✓	✓✓	✓	✓		✓✓	✓✓	✓✓	✓✓	
paints	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓✓	
bitumen (only < 15° C)			✓✓	✓	✓✓				✓✓	✓	✓✓		
epoxy resin			✓	✓✓	✓				✓	✓✓	✓		

✓ = conditionally suitable    ✓✓ = very suitable

**THE RIGHT CHOICE**

of the diamond cup wheels depends from the surface and affects the desired grinding result. It will help to achieve the optimal expected result.